







Air Boy® Safe-Jet 4in1

HIGH AIRFLOW, LOW NOISE LEVEL, UNBLOCKABLE, & INTEGRATED CHIP SHIELD

The Air Boy® Safe-Jet combines all the best features. It is silent, with only 78 dB at 6 bar, and complies with both OSHA's and the EU's noise level requirements. The airflow is very high at 600 l/min at 8 bar, compared to most other low-noise-level blowguns on the market. The Safe-Jet Nozzle utilizes the "Coanda" effect to drive ambient air to the tip of the nozzle, increasing the air thrust. The design of the nozzle ensures that it is unblockable by diverting the air through unblocked holes, thereby complying with OSHA STD 1-13.1 requirements. We have integrated a chip shield into the nozzle to reduce splash-back of loose chips and fluids when cleaning.

The JWJL ergonomic design is a classic. We use compressed air to ease the activation of the handle, making it easy, accurate, and simple to operate. The Air Boy® Safe-Jet is produced in impact-resistant plastic (POM).

MAX 30 PSI When deadended OSHA STD 1-13.1	OK	MAX 85 dB EU & OSHA 1910.95 (b&c)	OK 10% better	DURABLE 28 million activa- tions and still tight!	OK
--	-----------	--	----------------------------	--	-----------

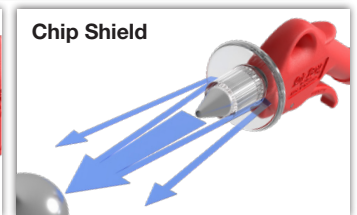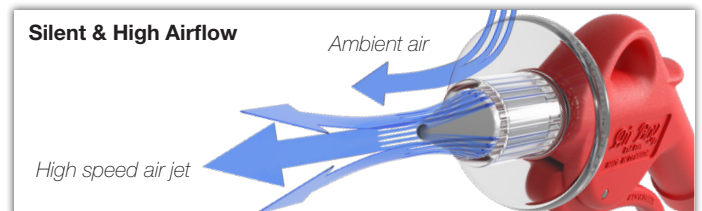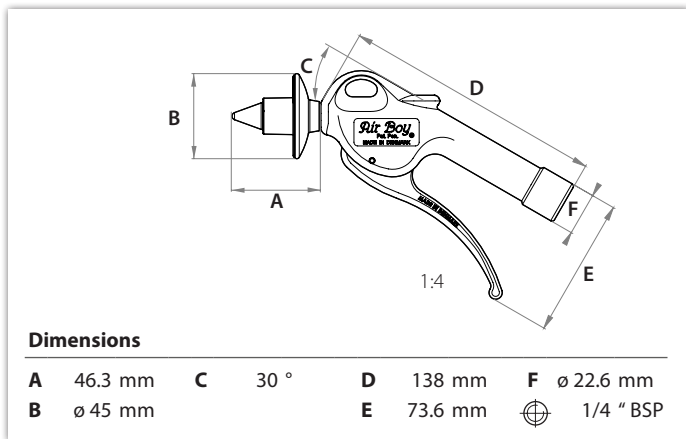

Materials		Specifications		Safety Standards			
Handle, trigger & valve	POM (Acetal plastic)	P	Max 16 bar	2003/10/CE	Max 85 dB	OK	
Gaskets / O-rings	Nitrile		600 l/min at 8 bar, (425 l/min (6bar))		OSHA 1910.95 (b)	Max 90 dB 8 hr	OK
Blowing tube & axle	Stainless Steel		78 dB at 6 bar, (83 dB (8 bar))		OSHA STD 1-13.1	Max 30 psi when deadended	OK
Nozzle	ABS & Aluminum (2011)		-10°C to +60°C		Reach / RoHS	Aluminum alloy in nozzle contains lead	Note
Spring	Hardened spring wire		~0,108 kg		Proposition 65	Warning mandatory due to lead in Alu.	Note

