

INSTRUCTIONS FOR

DIGITAL BRAKE DRUM CALLIPER 0-300mm/0-12 inch


Thank you for purchasing our product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS, AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE, FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.

■ **WARNING!** *Ensure Health and Safety, local authority and general workshop practice regulations are adhered to when using tools and equipment.*

- × **DO NOT** use caliper, if damaged.
- ✓ Maintain calliper in good and clean condition for best and safest performance.
- ✓ Keep the work area clean, uncluttered and ensure there is adequate lighting.
- ✓ Keep children and unauthorised persons away from the work area.
- × **DO NOT** use the calliper for any purpose other than for which it is designed.
- × **DO NOT** get calliper wet or use in damp or wet locations, or areas where there is condensation.
- ✓ Keep calliper clean and dry, using a dry cotton cloth only.
- × **DO NOT** dip or submerge the calliper in any type of liquid.
- × **DO NOT** expose calliper to bright sunlight or dust.
- × **DO NOT** dis-assemble calliper. The calliper must be checked by qualified service personnel only.
- × **DO NOT** apply any voltage to the calliper i.e. with an electric marker pen.
- ✓ The calliper is a precision instrument. Treat with care, avoid using force and do not subject to knocks or shocks.
- ✓ Take particular care not to damage or scratch the scale surface.
- ✓ Use calliper in reasonably constant temperature conditions of approximately 20 °C .
- ✓ When not in use, **turn off** and store calliper in a safe, dry, childproof location.

Hardened and tempered stainless steel gauge, High figures in LCD display for ease of reading. Metric or Imperial read-out. Zero setting control allows for comparative measurement. Include serial port connection for computer interface.

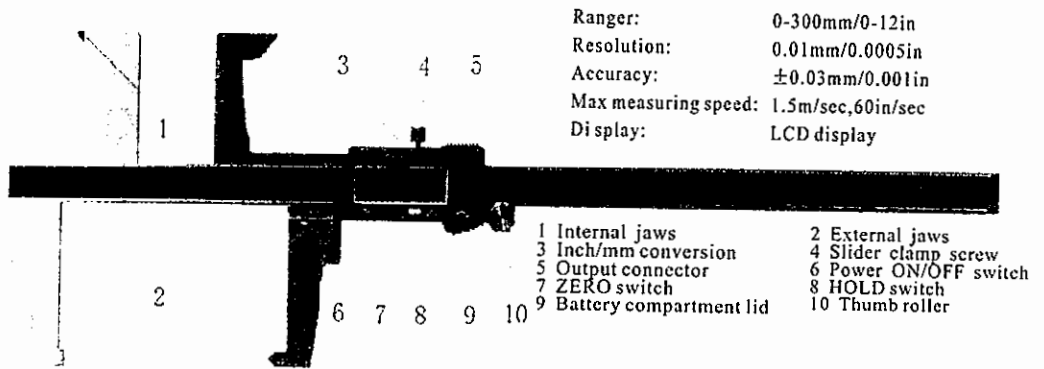

3.1 Ensure all measuring surfaces are clean and turn on caliper by pressing "On" button. Wait at least one second before use.

3.2 Use the "mm/Inch" button to toggle between inches and mm at any time.

3.3 Press the "Zero" button at any time to zero the reading.

3.4 Internal jaws for pad wear

3.5 External jaws for pad and rotor wear

■ **WARNING!** Ensure that you have read and understood Section 1 safety instructions before commencing

Fitting a new battery.

A flashing display indicates that the battery is exhausted - replace as follows:

1. Remove battery cover by sliding backward and lifting the lower edge.

2. Remove exhausted battery and fit replacement with +ve side uppermost.

3. Dispose of old battery in a safe and approved manner. Do not burn. If the display fails to alter when the slide is moved, remove the battery, wait for around 3 minutes, then fit the battery again.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of product.

